



SCHEMATICS





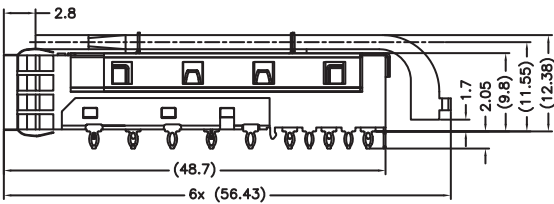

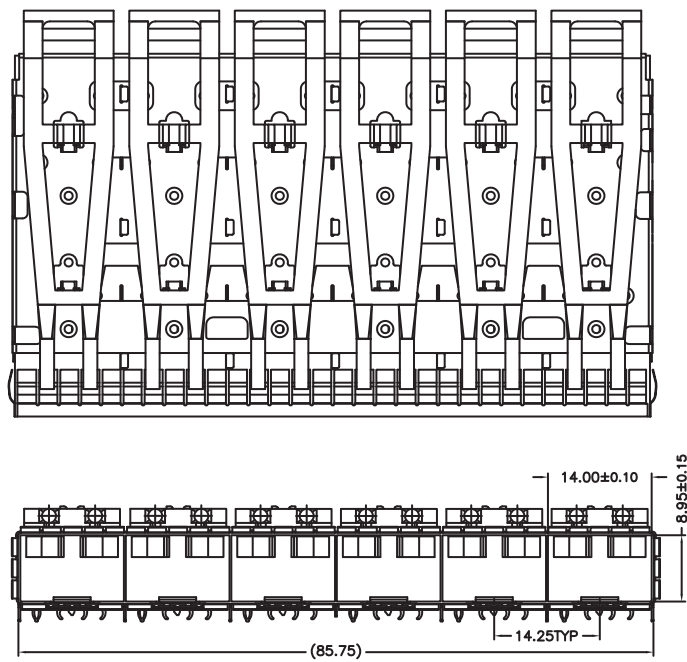





- NOTES:
- 1.MATERIAL:
CAGE: COPPER ALLOY, NICKEL PLATING, THICKNESS 0.25mm
LIGHT PIPE: CLEAR POLYCARBONATE
 - PACKAGING: TRAY PACKAGING
 - 3.TEMPERATURE RANGE: -55°C TO +85°C





LABS
Technology & Value

Drafted by:XiaoMing

Dimensions:mm Unless otherwise specified, all tolerances are ± 0,25		Approved By: TSLEE	
SFP+ 1x6 Cage		Part No:SFPP016PB	REV. A
		SHEET 1 OF 3	

	QUANTITY	DIA.	INSERTION
	24	Ø1.05	 1.23 WIDE PRESS FIT
	12	Ø0.95	 1.10 NARROW PRESS FIT
	12	Ø0.95	 0.50
	18	Ø1.05	 0.57
	5	Ø0.95	 0.50

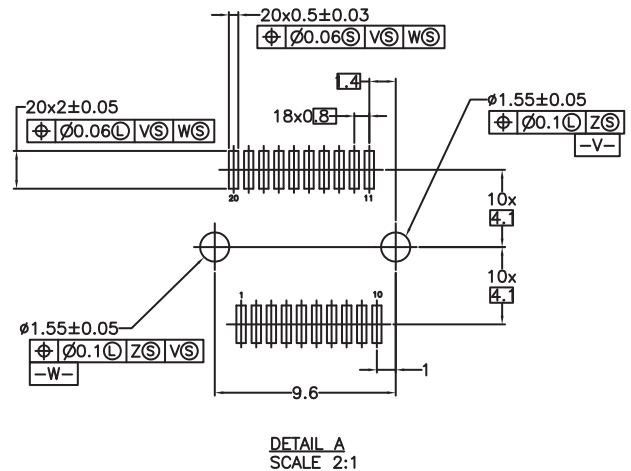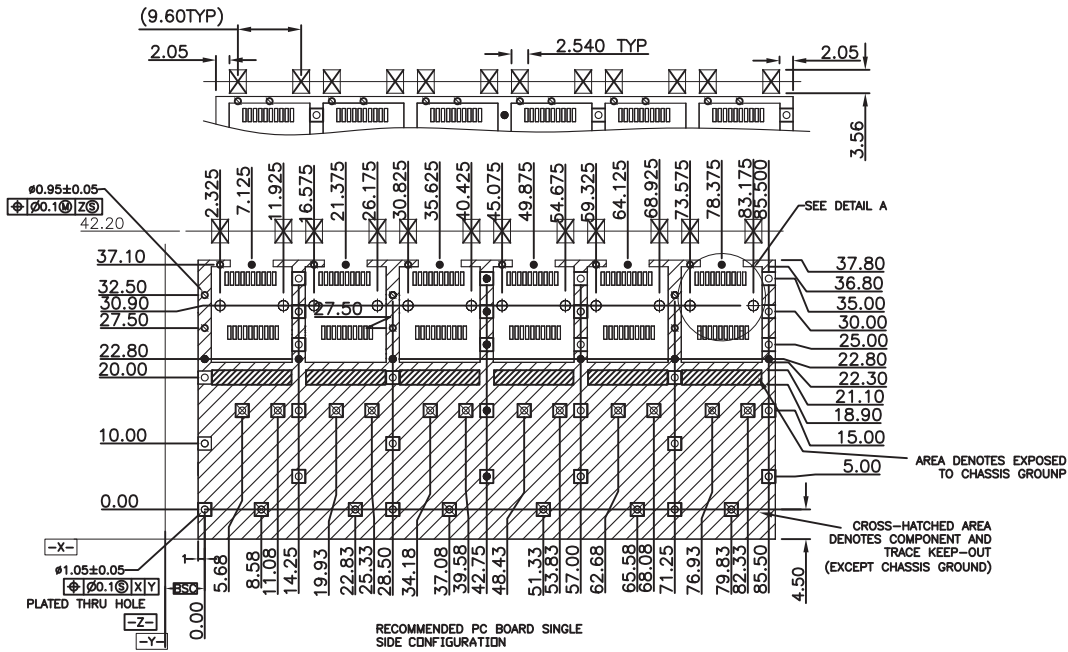

Drafted by: XiaoMing

Dimensions:mm

Unless otherwise specified, all tolerances are ± 0.25


SFP+ 1x6 Cage

Approved By: TSLEE


Part No:SFP016PB

REV.
A

SHEET 2 OF 3

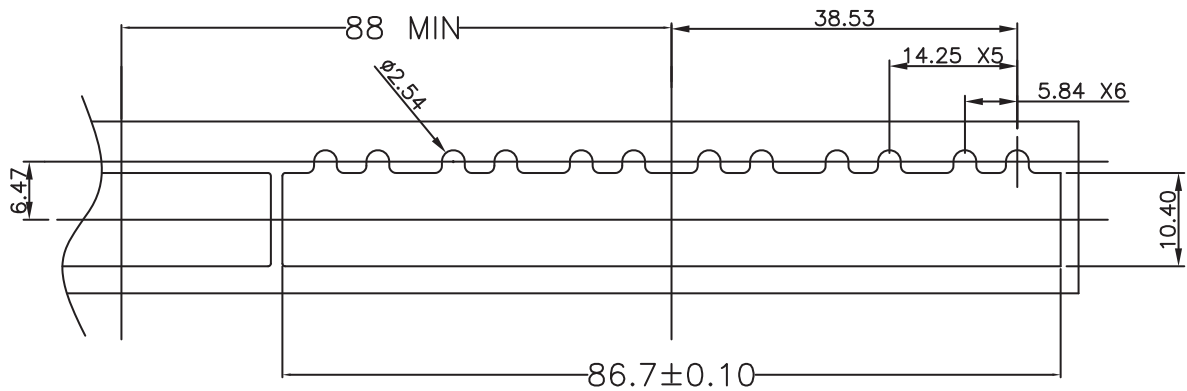

RECOMMENDED BEZEL CUT-OUT SINGLE SIDED APPLICATIONS

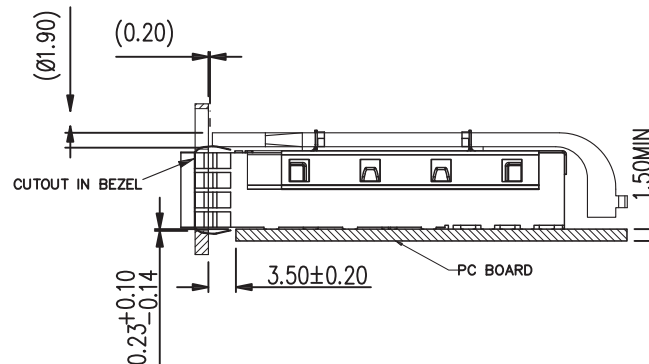

MOUNTED ON PC BOARD
SHOWN THRU RECOMMEND BEZEL



Drafted by: XiaoMing

Dimensions: mm

Unless otherwise specified, all tolerances are ± 0.25

SFP+1x6 cage

Approved By: TSLEE

Part No: SFPP016PB

REV.
A

SHEET 3 OF 3