




SCHEMATICS

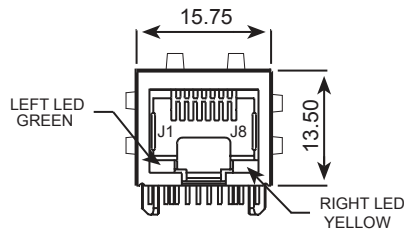

FRONT VIEW

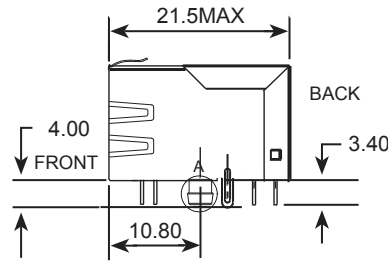


SIDE VIEW





DATE CODE: YYWW

YEAR WEEK

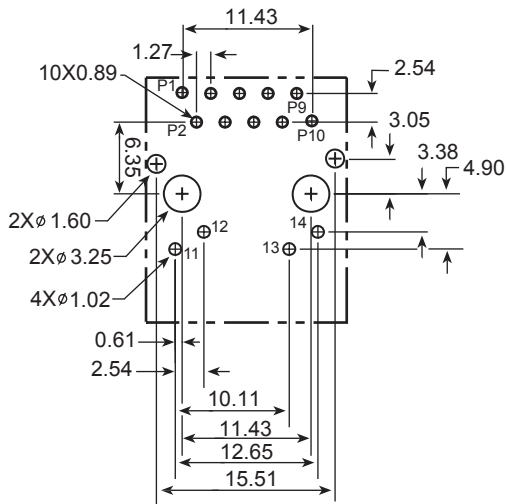

PCB Layout
Viewed from Component Side



DETAIL A

MECHANICAL SPECIFICATIONS:

1. Housing & insert material: PBT94V-0
2. Contact material: 0.35mm phosphor bronze 15u gold plating over nickel
3. Shield: 0.20mm thickness brass with nickel plated.
4. Mating/unmating force: 2.2kg. F MAX.
5. Retention strength: 9kg. F MIN between jack and plug.
6. Operating life: 600 cycle MIN.
7. The part is recommended for wave soldering process, peak temp. is 265 degree C, 5 seconds (see the wave soldering curve)
8. Jack cavity conforms with FCC part 68 subpart F (connector).

ENVIRONMENTAL SPECIFICATIONS:

1. Storage Temp. : -40 °C ~ +85 °C Relative humidity<70%.
2. Operation Temp. : -40° ~ +85°C



Dimensions:mm
Unless otherwise specified, all tolerances are ± 0.25

1000 BASE-T, Tab-Down
Shielded, LEDs

Approved By: TSLEE


Part No: WRJ-G111083ANL

REV.
B

Drafted by:XiaoMing

SHEET 1 OF 4

ELECTRICAL CIRCUIT

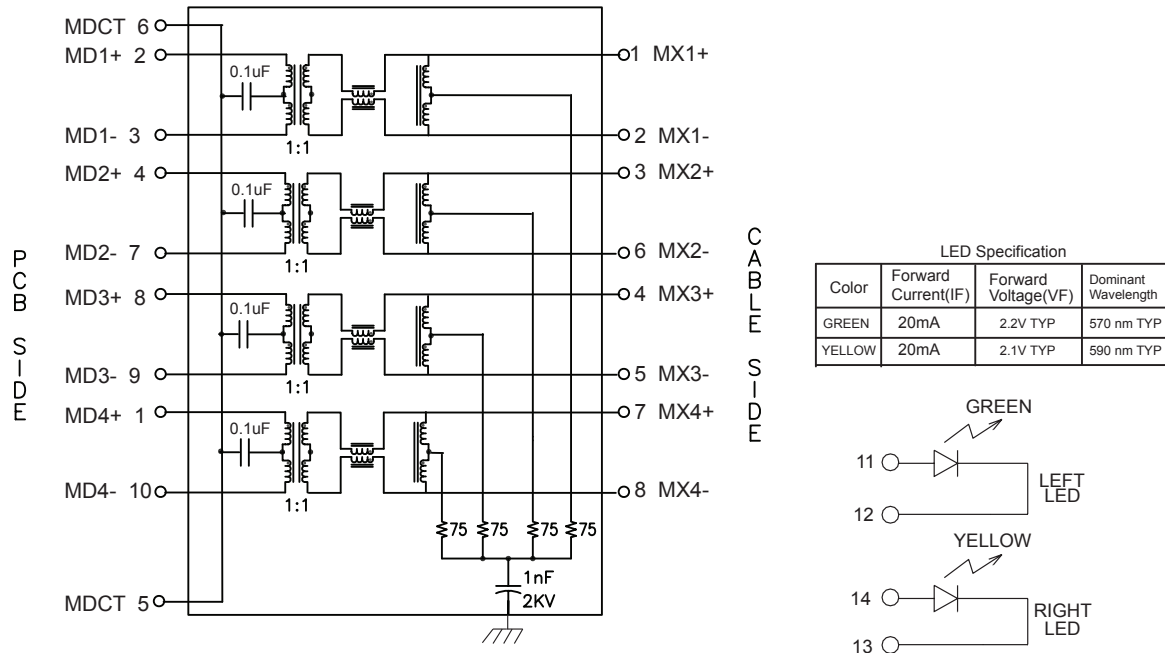

ELECTRICAL SPECIFICATIONS @25°C UNLESS OTHERWISE NOTED:

Insertion Loss: 1-100MHZ -1.0dB MAX
 Return Loss: 1-30MHZ -18.0dB MIN
 30-60MHZ -16.0dB MIN
 60-80MHZ -12.0dB MIN
 80-100MHZ -10.0dB MIN
 Crosstalk: 10-30MHZ -40.0dB MIN
 30-60MHZ -35.0dB MIN
 60-100MHZ -30.0dB MIN
 Common Mode Rejection: 1-100MHZ -30.0dB MIN
 Hipot:1500VAC 60S 1mA
 OCL:350uH MIN @ 100KHZ 100mV 8mA DC



Drafted by: XiaoMing

Dimensions:mm
 Unless otherwise specified, all tolerances are ± 0.25

1000 BASE-T, Tab-Down
 Shielded, LEDs


Approved By: TSLEE

Part No: WRJ-G111083ANL

REV.
 B

SHEET 2 OF 4

Suggested Profile of Wave Solder for RoHS products

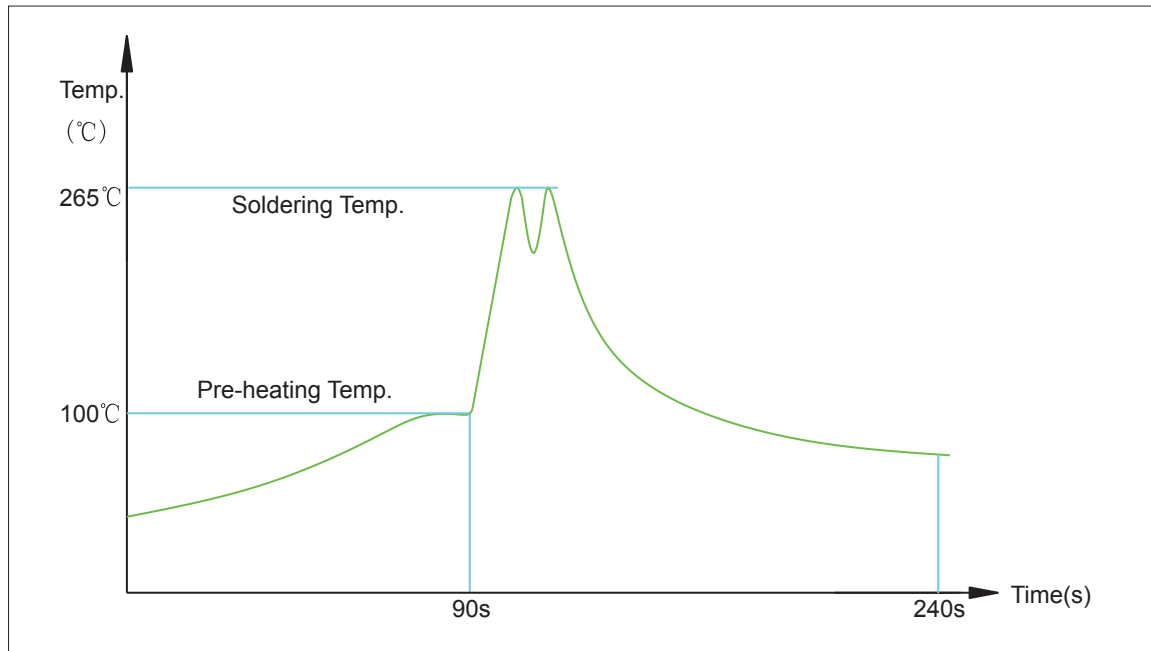

1. Maximum soldering temperature: 265°C
2. Maximum soldering time: 5 seconds
3. SnAgCu or SAC, melting point is 219 °C
4. Any plastic components located under the Printed Circuit Board / Printed Wiring Board surface might be very slightly melted by recommended temperature profile. It will however, not affect the connector function. (For example, the plastic pins of the connector)



Drafted by: XiaoMing

Dimensions:mm

Unless otherwise specified, all tolerances are $\pm 0,25$

1000 BASE-T , Tab-
Down Shielded, LEDs


Approved By: TSLEE

Part No: WRJ-G111083ANL

REV.
B

SHEET 3 OF 4

PACKING

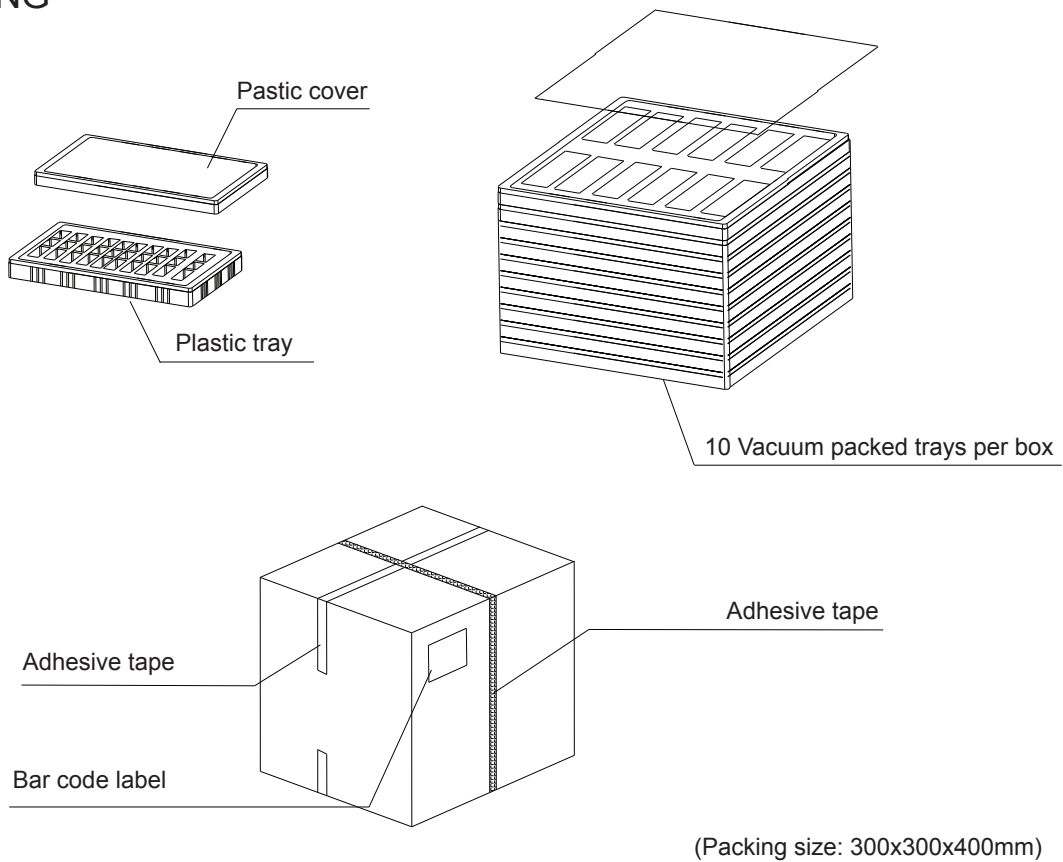

1. The connectors are placed in a plastic tray in PPC recyclable material. Each tray contains 120 connectors. Each tray has a plastic cover in PPC recyclable material.
2. A carton sheet is placed on each side of the tray. The tray is then vacuum packed in a recyclable PE bag.
3. In each box there are 10 trays placed on top of each other. Each box contains total 1200 connectors.
4. Each box dimension is 300x300x400mm or 0.036CBM with a net weight of approximately 9.7kg and a gross weight of approximately 11.5 kg.



Drafted by: XiaoMing

Dimensions: mm

Unless otherwise specified, all tolerances are $\pm 0,25$

1000 BASE-T , Tab-
Down
Shielded, LEDs

Approved By: TSLEE

Part No: WRJ-G111083ANL

REV.
B

SHEET 4 OF 4